



SIM – Spartherm Installation Modules



The fireplace systems with a stylish finish are durable and modern.

Concrete is a great choice of material when you seek to combine safety, elegance and design freedom.

Like a protective skin, the concrete cladding does not only protect the Spartherm Fireplace Insert but it also stores the heat and releases it slowly into the room. The external appearance of the concrete cladding personifies the straight lines of modern architecture, and create an elegant and stylish feature that combines functionality to provide a comfortable warm fire.

The heat storage capability of the thermal concrete allows a slow pleasant release of radiant heat into the room.

The production of precision fit module parts are directly matched to the Spartherm fireplace inserts thus making it simple to create a perfect construction that is functional.



Your creativity wrapped in warmth.

To suit all tastes and requirements the concrete cladding modules can be painted and plastered with the appropriate materials. If required the SIM fireplace system can be raised by using additional module elements and can be used to create an elegant hearth for the three sided fireplace inserts. The flue pipe connection can be top-mounted or back-mounted and even side-mounted when using a corner fireplace insert.

With the Spartherm-Installation-Modules, you combine the direct radiant heat from the fireplace insert with the thermal heat storage capability of a tiled stove. The large glass fireplace doors allow for a great view of the fire. You have the advantage of the quickly generated radiant heat from the fire and the heat generated by the heat storage material as well.

Application example for
the creative design of the
Spartherm installation module.

To sum up the advantages of the SIM system are, fast effective heat and heat storage capability. The cladding elements prevent the overheating of rooms with low calorific demands.



Contents

Pages 04 - 07	Straight	
Pages 08 - 13	L-shape	
Pages 14 - 17	U-shape	
Pages 18 - 19	Range of variations	
Pages 20 - 21	Technical data	



SIM 2/2/Varia AS-4S-2

€ 20

SIM 2/2/Varia ASH-4S-2

€ 20

Thermal concrete with a modern surface





SIM 1/3/Varia M-60h-4S GET

€ 20



SIM 2/3/Varia M-80h-4S GET
20 





SIM 2/2/Mini 2LRh-4S

20 





SIM 3/3/Varia 2L-55h-4S

€ 20

Less space required due to
a compact design

SIM 1/3/Varia 2R-55h-4S

20 €





Quality and strength – with precision fit module parts.

SIM 2/2/Varia AS-2Rh-4S







SIM 1/3/Arte U-70h-4S

21 €



SIM 1/3/T/Arte 3RL-60h-4S

€ 21

A lot of heat storage capability – quick and easy to install.





SIM 3/3/Arte 3RL-80h-4S

€ 21


SIM 2/3/T/Arte 3RL-100h-4S
21





Versatile variation options – your individuality, your style

Spartherm Installation Modules		SIM Varia AS-4S-2	SIM Varia ASH-4S-2	SIM Varia M-60h-4S GET	SIM Varia M-80h-4S GET	SIM Varia AS-2Lh-4S	SIM Varia AS-2Rh-4S	SIM Varia 2L-55h-4S	SIM Varia 2R-55h-4S	SIM Mini 2LRh-4S
Substructure modules	1 module	SIM 1/2/Varia AS-4S-2 Height [Gh] = 1243 mm Weight = 460 kg 	SIM 1/2/Varia ASH-4S-2 Height [Gh] = 1243 mm Weight = 490 kg 	SIM 1/3/Varia M-60h-4S GET Height [Gh] = 1713 mm Weight = 520 kg 	SIM 1/3/Varia M-80h-4S GET Height [Gh] = 1723 mm Weight = 610 kg 	SIM 1/2/Varia AS-2Lh-4S Height [Gh] = 1243 mm Weight = 490 kg 	SIM 1/2/Varia AS-2Rh-4S Height [Gh] = 1243 mm Weight = 490 kg 	SIM 1/3/Varia 2L-55h-4S Height [Gh] = 1712 mm Weight = 520 kg 	SIM 1/3/Varia 2R-55h-4S Height [Gh] = 1712 mm Weight = 520 kg 	SIM 1/2/Mini 2LRh-4S Height [Gh] = 1437 mm Weight = 420 kg 
	2 modules	SIM 2/2/Varia AS-4S-2 Height [Gh] = 1508 mm Weight = 510 kg 	SIM 2/2/Varia ASH-4S-2 Height [Gh] = 1508 mm Weight = 540 kg 	SIM 2/3/Varia M-60h-4S GET Height [Gh] = 1918 mm Weight = 570 kg 	SIM 2/3/Varia M-80h-4S GET Height [Gh] = 1928 mm Weight = 670 kg 	SIM 2/2/Varia AS-2Lh-4S Height [Gh] = 1508 mm Weight = 540 kg 	SIM 2/2/Varia AS-2Rh-4S Height [Gh] = 1508 mm Weight = 540 kg 	SIM 2/3/Varia 2L-55h-4S Height [Gh] = 1917 mm Weight = 560 kg 	SIM 2/3/Varia 2R-55h-4S Height [Gh] = 1917 mm Weight = 560 kg 	SIM 2/2/Mini 2LRh-4S Height [Gh] = 1642 mm Weight = 470 kg 
	3 modules	SIM 3/2/Varia AS-4S-2 Height [Gh] = 1773 mm Weight = 560 kg 	SIM 3/2/Varia ASH-4S-2 Height [Gh] = 1773 mm Weight = 590 kg 	SIM 3/3/Varia M-60h-4S GET Height [Gh] = 2183 mm Weight = 620 kg 	SIM 3/3/Varia M-80h-4S GET Height [Gh] = 2193 mm Weight = 730 kg 	SIM 3/2/Varia AS-2Lh-4S Height [Gh] = 1773 mm Weight = 590 kg 	SIM 3/2/Varia AS-2Rh-4S Height [Gh] = 1773 mm Weight = 590 kg 	SIM 3/3/Varia 2L-55h-4S Height [Gh] = 2182 mm Weight = 600 kg 	SIM 3/3/Varia 2R-55h-4S Height [Gh] = 2182 mm Weight = 600 kg 	SIM 3/2/Mini 2LRh-4S Height [Gh] = 1907 mm Weight = 520 kg 
	Optional expansion modules for flush ceiling design	✓	✓	✓	✓	✓	✓	✓	✓	✓

The colour and surface texture may vary depending on the cement casting process. This makes every Spartherm installation module unique.


SIM Arte U-50h-4S		SIM Arte U-70h-4S		SIM Arte 3RL-60h-4S		SIM Arte 3RL-80h-4S		SIM Arte 3RL-100h-4S	
Optional hearth		Optional hearth		Optional hearth		Optional hearth		Optional hearth	
SIM 1/3/Arte U-50h-4S	SIM 1/3/T/Arte U-50h-4S	SIM 1/3/Arte U-70h-4S	SIM 1/3/T/Arte U-70h-4S	SIM 1/3/Arte 3RL-60h-4S	SIM 1/3/T/Arte 3RL-60h-4S	SIM 1/3/Arte 3RL-80h-4S	SIM 1/3/T/Arte 3RL-80h-4S	SIM 1/3/Arte 3RL-100h-4S	SIM 1/3/T/Arte 3RL-100h-4S
Height [Gh] = 1742 mm Weight = 730 kg	Height [Gh] = 1794 mm Weight = 760 kg	Height [Gh] = 1742 mm Weight = 830 kg	Height [Gh] = 1794 mm Weight = 865 kg	Height [Gh] = 1768 mm Weight = 690 kg	Height [Gh] = 1820 mm Weight = 720 kg	Height [Gh] = 1768 mm Weight = 780 kg	Height [Gh] = 1820 mm Weight = 810 kg	Height [Gh] = 1768 mm Weight = 860 kg	Height [Gh] = 1820 mm Weight = 900 kg
									
SIM 2/3/Arte U-50h-4S	SIM 2/3/T/Arte U-50h-4S	SIM 2/3/Arte U-70h-4S	SIM 2/3/T/Arte U-70h-4S	SIM 2/3/Arte 3RL-60h-4S	SIM 2/3/T/Arte 3RL-60h-4S	SIM 2/3/Arte 3RL-80h-4S	SIM 2/3/T/Arte 3RL-80h-4S	SIM 2/3/Arte 3RL-100h-4S	SIM 2/3/T/Arte 3RL-100h-4S
Height [Gh] = 1947 mm Weight = 780 kg	Height [Gh] = 1999 mm Weight = 810 kg	Height [Gh] = 1947 mm Weight = 885 kg	Height [Gh] = 1999 mm Weight = 920 kg	Height [Gh] = 1973 mm Weight = 730 kg	Height [Gh] = 2026 mm Weight = 760 kg	Height [Gh] = 1973 mm Weight = 830 kg	Height [Gh] = 2026 mm Weight = 860 kg	Height [Gh] = 1973 mm Weight = 920 kg	Height [Gh] = 2026 mm Weight = 960 kg
									
SIM 3/3/Arte U-50h-4S	SIM 3/3/T/Arte U-50h-4S	SIM 3/3/Arte U-70h-4S	SIM 3/3/T/Arte U-70h-4S	SIM 3/3/Arte 3RL-60h-4S	SIM 3/3/T/Arte 3RL-60h-4S	SIM 3/3/Arte 3RL-80h-4S	SIM 3/3/T/Arte 3RL-80h-4S	SIM 3/3/Arte 3RL-100h-4S	SIM 3/3/T/Arte 3RL-100h-4S
Height [Gh] = 2212 mm Weight = 830 kg	Height [Gh] = 2264 mm Weight = 860 kg	Height [Gh] = 2212 mm Weight = 940 kg	Height [Gh] = 2264 mm Weight = 980 kg	Height [Gh] = 2238 mm Weight = 770 kg	Height [Gh] = 2290 mm Weight = 800 kg	Height [Gh] = 2238 mm Weight = 880 kg	Height [Gh] = 2290 mm Weight = 910 kg	Height [Gh] = 2238 mm Weight = 980 kg	Height [Gh] = 2290 mm Weight = 1020 kg
									
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Technical data

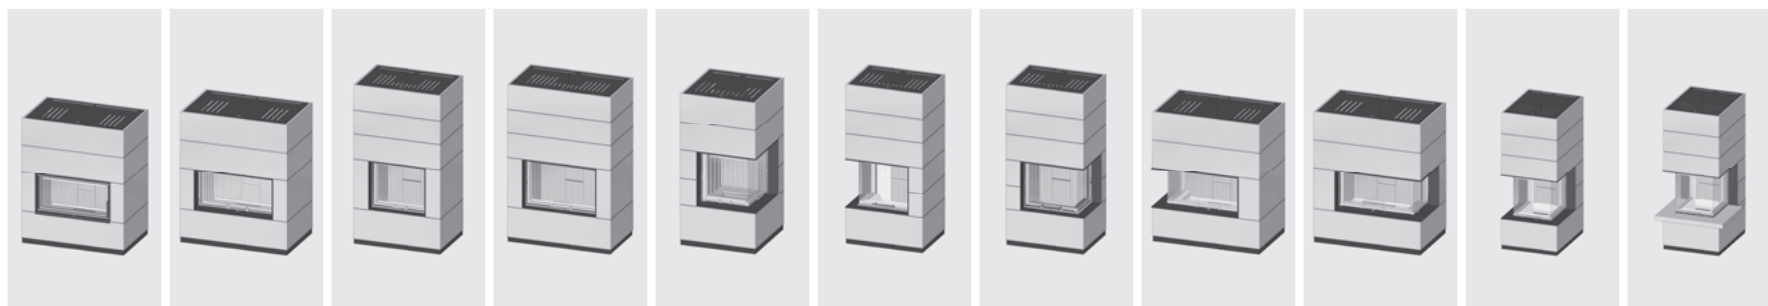

Spartherm Installation Modules		SIM Varia AS-4S-2	SIM Varia ASH-4S-2	SIM Varia M-60h-4S GET	SIM Varia M-80h-4S GET	SIM Mini 2LRh-4S	SIM Varia 2L-55h-4S	SIM Varia 2R-55h-4S	SIM Varia AS-2Lh-4S	SIM Varia AS-2Rh-4S	Optional hearth SIM Arte U-50h-4S	
Window shape												
Dimensions	Door width [Tb]	741 mm	730 mm	606 mm	802 mm	465/465 mm	583/391 mm	583/391 mm	730/358 mm	730/358 mm	499/501/499 mm	
	Door height [Th]	366 mm	370 mm	514 mm	520 mm	500 mm	510 mm	510 mm	370 mm	370 mm	544 mm	
	Total width [Gb]	1022 mm	1022 mm	938 mm	1134 mm	715 mm	830 mm	830 mm	1022 mm	1022 mm	720 mm	880 mm
	Total depth [Gt]	650 mm	650 mm	650 mm	650 mm	715 mm	635 mm	635 mm	650 mm	650 mm	900 mm	980 mm
	Flue pipe ø	180 mm	180 mm	180 mm	180 mm	180 mm	180 mm	180 mm	200 mm	200 mm	200 mm	
Performance	Nominal heat output	7.0 kW	7.0 kW	8.0 kW	9.0 kW	7.0 kW	7.0 kW	7.0 kW	7.0 kW	7.0 kW	9.0 kW	
	Thermal output range	4.9 – 9.1 kW	4.9 – 9.1 kW	5.6 – 10.4 kW	6.3 – 11.7 kW	4.9 – 9.1 kW	4.9 – 9.1 kW	4.9 – 9.1 kW	4.9 – 9.1 kW	4.9 – 9.1 kW	6.3 – 11.7 kW	
	Efficiency	> 80 %	> 80 %	80 %	> 80 %	80 %	> 80 %	> 80 %	> 80 %	> 80 %	80 %	
	Mass flow of flue gas	7.0 g/s	7.0 g/s	7.3 g/s	7.0 g/s	6.2 g/s	6.1 g/s	6.1 g/s	6.6 g/s	6.6 g/s	8.6 g/s	
	Flue gas temperature at device connection	275 °C	275 °C	311 °C	279 °C	343 °C	325 °C	325 °C	311 °C	311 °C	310 °C	
	min. delivery pressure at device connection	12 Pa	12 Pa	12 Pa	12 Pa	12 Pa	12 Pa	12 Pa	12 Pa	12 Pa	12 Pa	
	Level 1 Level 2 BlmSchV	✓ ✓	✓ ✓	✓ ✓	✓ ✓	✓ ✓	✓ ✓	✓ ✓	✓ ✓	✓ ✓	✓ ✓	
Info	15a BVG (Austria)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
	Door closure	hinged	elevating	elevating	elevating	elevating	elevating	elevating	elevating	elevating	elevating	
Info	Weight of the fireplace insert	171 kg	212 kg	205 kg	250 kg	160 kg	240 kg	240 kg	212 kg	212 kg	351 kg	

The illustrations show the models with a substructure module.
Details of total heights and the weight of each version can be found in the summary on pages 18/19.

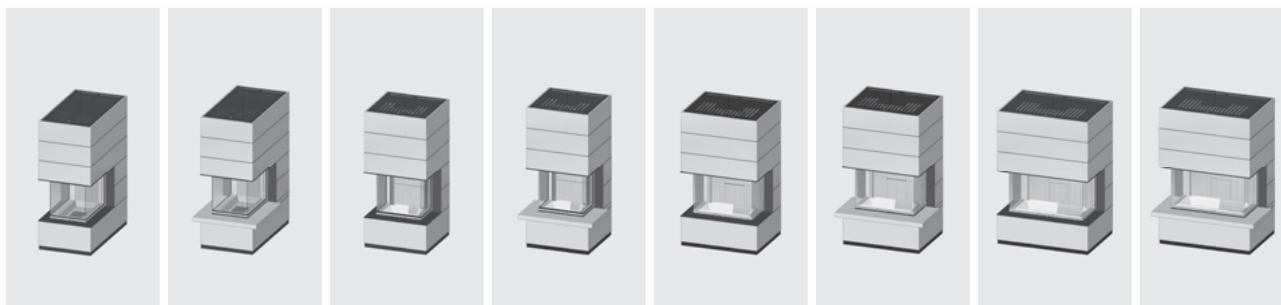


Optional hearth
SIM Arte U-70h-4S

Optional hearth
SIM Arte 3RL-60h-4S

Optional hearth
SIM Arte 3RL-80h-4S

Optional hearth
SIM Arte 3RL-100h-4S



Spartherm Installation Modules



Window shape

712/501/712 mm		370/600/370 mm		400/800/400 mm		450/1000/450 mm		Door width [Tb]
544 mm		570 mm		570 mm		570 mm		Door height [Th]
720 mm	880 mm	820 mm	980 mm	1020 mm	1180 mm	1220 mm	1380 mm	Total width [Gb]
1300 mm	1380 mm	795 mm	875 mm	835 mm	915 mm	875 mm	955 mm	Total depth [Gt]
200 mm		200 mm		200 mm		200 mm		Flue pipe ø
11.0 kW		7.5 kW		9.0 kW		11.0 kW		Nominal heat output
7.7 - 14.3 kW		5.3 - 9.8 kW		6.3 - 11.7 kW		7.7 - 14.3 kW		Thermal output range
> 78 %		> 80 %		> 80 %		> 78 %		Efficiency
11.3 g/s		7.0 g/s		7.3 g/s		10.3 g/s		Mass flow of flue gas
310 °C		310 °C		335 °C		360 °C		Flue gas temperature at device connection
12 Pa		12 Pa		12 Pa		12 Pa		min. delivery pressure at device connection
✓ ✓		✓ ✓		✓ ✓		✓ ✓		Level 1 Level 2 BlmSchV
✓		✓		✓		✓		15a BVG (Austria)
elevating		elevating		elevating		elevating		Door closure
375 kg		321 kg		351 kg		371 kg		Weight of the fireplace insert

Dimensions

Performance

Info

Discover the ...



- ... versatile and wide range of models
- ... the next generation – LINEAR 2
- ... tiled and thermal storage stoves
- ... custom-made products
- ... water storage and heat storage technology
- ... accessories – for efficient heating



Fireplace inserts – and a great deal more

SPARTHERM – THE FIRE COMPANY



Your specialist dealer:



Spartherm Feuerungstechnik GmbH

Maschweg 38 · D-49324 Melle · Tel. +49 5422/94 41-0 · Fax +49 5422/94 41-14

info@spartherm.com · www.spartherm.com

